




# TOCDDEM


## HYDRAULIC HAMMERS

**GETS THE JOB DONE!**



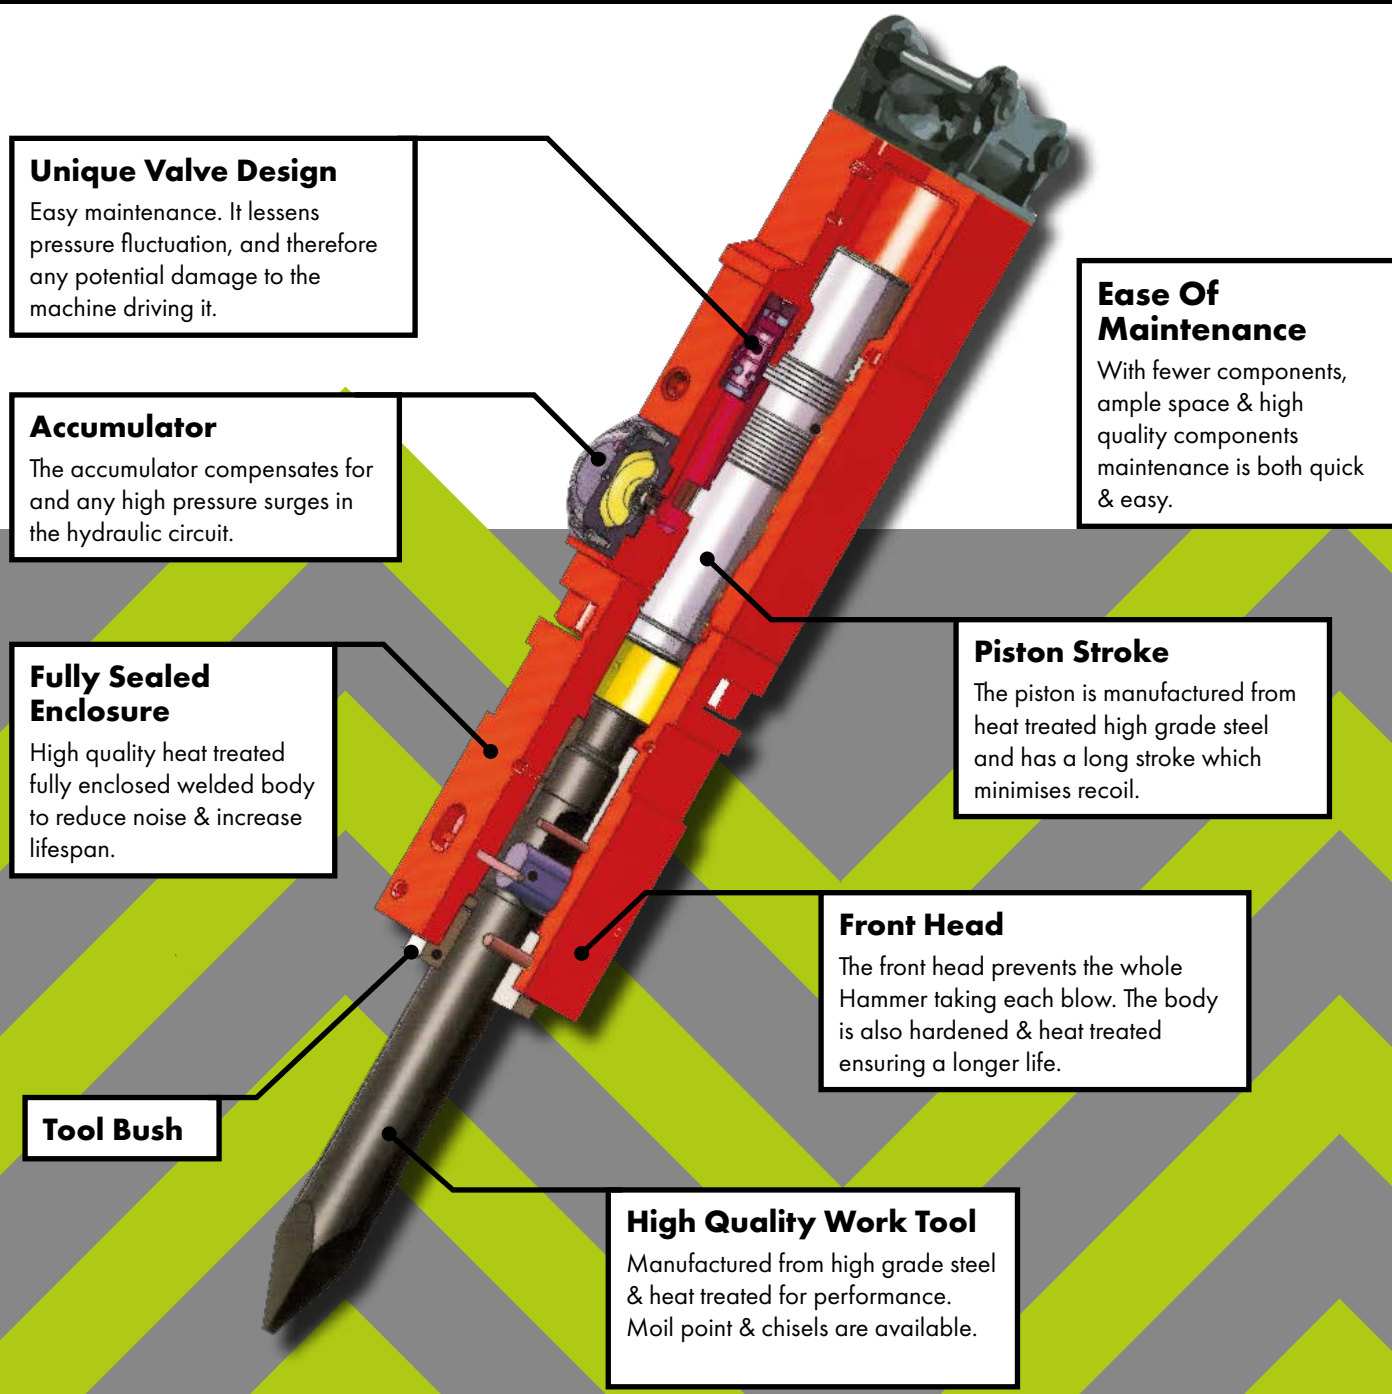


# GETS THE JOB DONE!

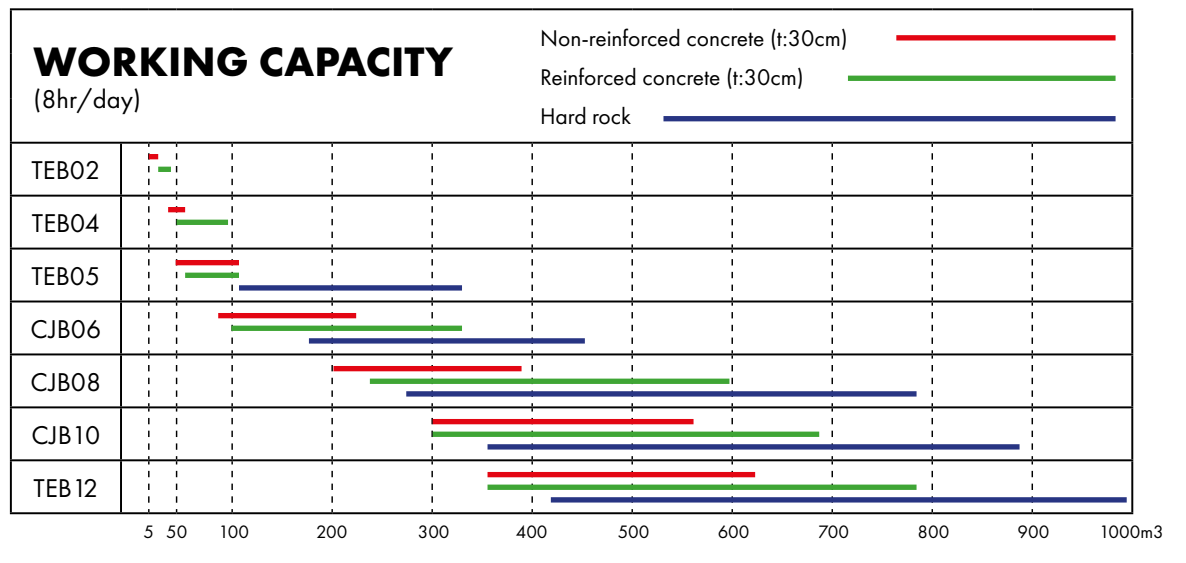

\*\* Due to ongoing development specifications may change at any time

\*\* Due to ongoing development specifications may change at any time

All TocDem Attachments Hydraulic Hammers are designed using the latest technology, advances in engineering & to the very highest specification. These units are able to easily cope with the demands of any Demolition, Mining, Construction or Utility site.

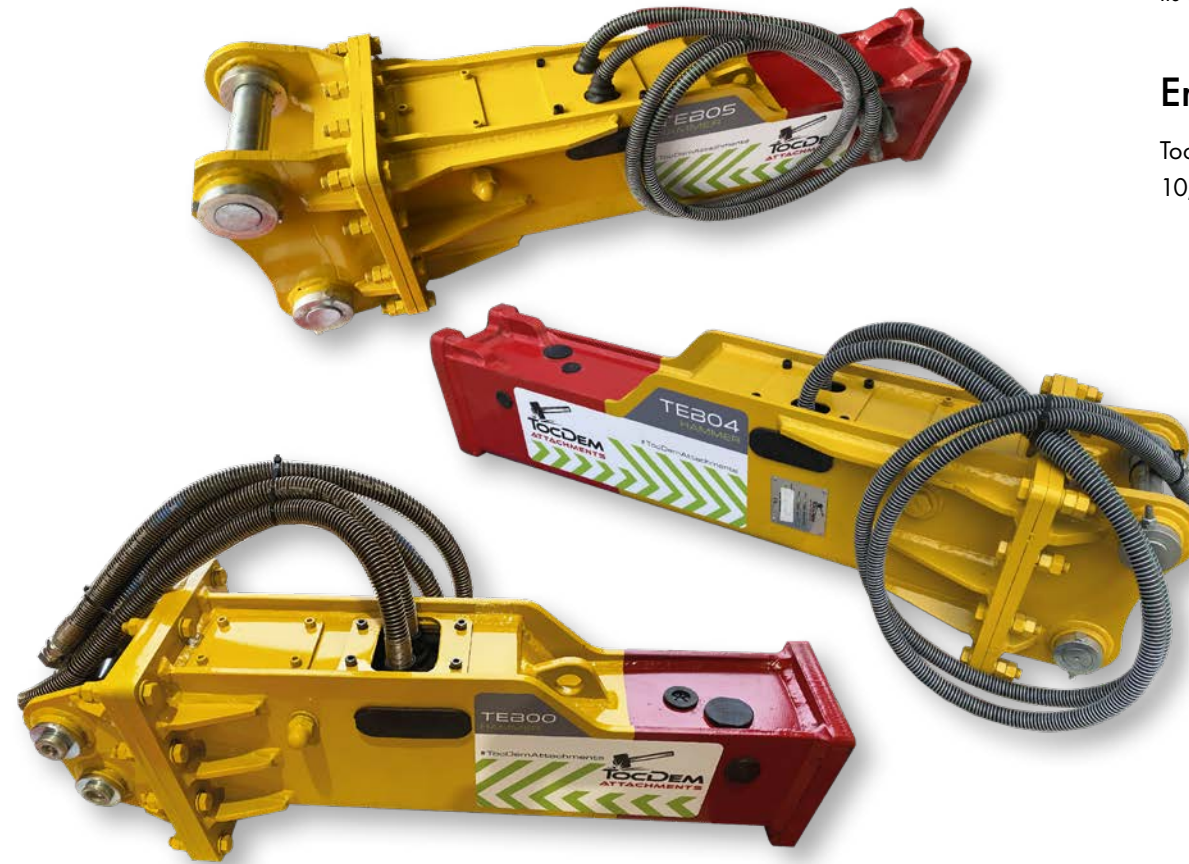

Every TocDem Hammer is supplied with:

- 2 Points / Chisels
- Head Bracket / Ears / Hanger
- 2 Head Bracket Pins
- 2 Hydraulic Hoses & Couplings
- Tool Box
- Gas Bottle
- Instruction Manual
- Parts Manual

### Excellent BPM Impact Rate – Increasing efficiency

TocDem Hammers give a severe and deep impact, coupled with a fast and efficient BPM “Blows Per Minute”. When put up against the competition the TocDem Hammer outperforms by virtue of its unique design & therefore saves you time and money.

### Energy Class

TocDem Hammers range from 150ft lb / 203 Joules through to a powerful and substantial 10,000 ft lb / 13557 Joules.

### Quality Control, Research & Development

As a service business as well as a manufacturer TocDem Attachments appreciate the need for quality control. A number of rigorous pre delivery inspections and test are carried out before any Hammer is supplied. As well as this TocDem Attachments are always evaluating current technology & latest techniques in an effort to constantly improve the product range.

### Technical, Customer & After Sales Support

A key feature of TocDem Attachments is always “standing behind” and supporting any product we sell. With this in mind we always stock a full range of all spares for TocDem Hammers available for immediate delivery and are always available to give technical advice & support on the range.

## Hydraulic Breaker

Model Number		TEB 00	TEB 02	TEB 04	TEB 05	TEB 06	TEB 08	TEB 10	TEB 12
Suitable Excavator	tonne	0.8-1.6	2.0-4.0	4.0-7.0	8.0-10.0	11.0-18.0	19-26	28-40	40-55
Suitable Excavator	lbs	1760 - 3520 lbs	4400 - 8800 lbs	8800 - 15400 lbs	17,600 - 22000 lbs	24200 - 39600 lbs	41800 - 57200 lbs	61600 - 88000 lbs	88000 - 121000 lbs
Chisel Diameter	mm / inches	40 / 1.75	53 / 2.08	75 / 2.95	85 / 3.34	100 / 3.93	140 / 5.51	155 / 6.10	175 / 6.88
Total Weight	kg	90	180	421	577	973	1989	2950	4210
Total Weight lbs	lbs	198	396	926.2	1269.4	2140.6	4375.8	6490	9262
Overall Length	mm / inches	983 / 38.70	1100 / 43.30	1528 / 60.15	1920 / 75.59	2260 / 88.97	2810 / 110.62	3152 / 124.09	3400 / 133.85
Operating Pressure	kg/cm2	90-120	90-120	110-160	120-170	150-170	160-180	160-180	160-180
Oil Flow	l/min	15-25	15-25	30-45	45-85	80-120	130-170	170-220	210-290
Impact Rate	BPM	800-1400	700-1200	500-800	400-700	400-700	400-600	250-400	200-350
Energy Class	ft lb	150	650	1000	1500	4000	6000	8000	10000
Hose Diameter	inch	1/2"	1/2"	1/2"	3/4"	3/4"	1"	1"	1.25"

\*\* Due to ongoing development specifications may change at any time

\*\* Due to ongoing development specifications may change at any time

