

TocDem Attachments & Utilities

COMPANY PROFILE & **PRODUCT CATALOGUE**

2026 / 2027

ENGINEERED TO PERFORM.
BUILT FOR DEMANDING JOBS.

TocDEM
ATTACHMENTS & UTILITIES

BRITISH ENGINEERING.
SERVING **NORTH AMERICA.**



BUILT TO PERFORM. ENGINEERED TO LAST. SUPPORTED ACROSS NORTH AMERICA.


Heavy-duty excavator
attachments engineered
in Britain.
Supporting contractors
across North America.

CONTACT OUR TEAM

Our team is ready to help you
choose the right excavator
attachments for your equipment
and applications.

✉ sales@tocdemusa.com

OVERVIEW



PART EXCHANGE & TRADE-IN OPTIONS

Trade-in options are available
to help simplify your next
equipment upgrade.



FINANCING SOLUTIONS

Flexible financing solutions
are available to help you invest
in the equipment your business
needs.



FULL STOCK OF REPLACEMENT PARTS

Replacement parts are
available to help reduce
downtime and keep your
equipment working.



UK ENGINEERING. NORTH AMERICA FOCUSED.

Engineered in Britain for the
demands of contractors across
North America.



FINANCING SOLUTIONS

Flexible financing options
designed to support your
equipment investment.



EXPERT CUSTOMER SUPPORT

Professional product support
from enquiry through
after-sales service.



3 YEAR WARRANTY

Every qualifying attachment
is backed by a 3-year warranty
for added confidence.

OVERVIEW



TEB SERIES HYDRAULIC HAMMERS

Powerful hydraulic breakers engineered for demolition, construction, quarrying and utility applications.

- High impact energy for maximum productivity
- Built for strength and long service life
- Reliable performance in tough conditions
- Suitable for a wide range of excavator sizes

6 - 9



TSH SERIES SCRAP SHEARS

Efficient cutting of structural steel, rebar, pipe and scrap metal for demolition and recycling.

- High cutting force for heavy steel
- 360° hydraulic rotation for precise positioning
- Interchangeable blades for easy maintenance
- Built for demanding demolition work

10 - 13




TGR SERIES SELECTOR GRABS

Versatile material handling for demolition, recycling, construction, forestry and waste management.

- 360° continuous rotation for full control
- Powerful gripping force for secure handling
- Configurable jaws for multiple applications
- Built to increase productivity on site

14 - 17

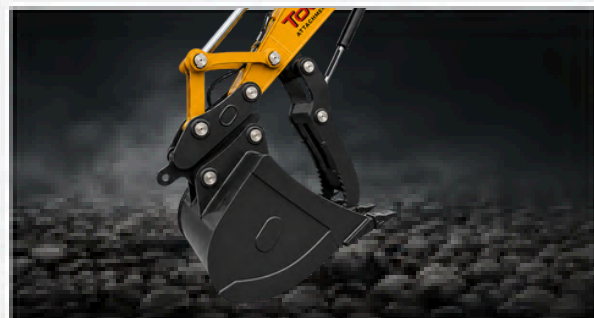

TOT SERIES HYDRAULIC THUMBS

Increase your excavator's versatility for gripping, lifting and placing a wide range of materials.

- Strong, durable construction
- Excellent gripping power and control
- Ideal for demolition, recycling and forestry
- Quick and straightforward installation

18 - 21

OVERVIEW



TRS SERIES ROTATING PULVERIZERS

Hydraulic rotating pulverizers designed for primary and secondary concrete processing and demolition.

- High crushing force for reinforced concrete
- 360° rotation for precise material processing
- Replaceable wear parts for long service life
- Built for demanding demolition applications

22 - 25



PUSH PRO SERIES PIPE PUSHERS

Pipe installation systems engineered for safe, accurate underground utility installation.

- Handles pipe sizes from 2" to 24"
- No manual handling required
- Dual acting hydraulic check valve (4000 mm+)
- Available in metric and imperial sizes

26 - 29



TB SERIES HEAVY DUTY EXCAVATOR BUCKETS

Heavy-duty excavator buckets designed for demanding construction, demolition and earthmoving applications.

- High strength steel for maximum durability
- Reinforced wear areas for extended service life
- Wide range of sizes to fit multiple excavators
- Built for tough construction conditions

30 - 33

HYDRAULIC HAMMERS

POWERFUL HYDRAULIC HAMMERS FOR DEMOLITION, CONSTRUCTION AND UTILITY APPLICATIONS

TocDem Hydraulic Hammers are engineered to deliver dependable breaking performance across demolition, construction, utilities, roadwork, quarrying and excavation applications. Built for strength, durability and productivity, they provide the impact energy needed to efficiently break concrete, rock, asphalt and other demanding materials.

Available for excavators from 1,760 lbs to 121,250 lbs, the TocDem Hydraulic Hammer range offers solutions for everything from compact utility excavators to large demolition and construction equipment.



POWERFUL BREAKING PERFORMANCE

Reliable impact energy for concrete, asphalt, rock and demolition applications.



MATCHED TO YOUR EXCAVATOR

Available for excavators from 1,760 lbs to 121,250 lbs, covering compact utility equipment through large demolition carriers.



HEAVY-DUTY DESIGN

Built for demanding jobsites with dependable performance and long service life.



3-YEAR WARRANTY

Every TocDem Hydraulic Hammer is backed by a 3-Year Warranty.

HYDRAULIC HAMMER SPECIFICATIONS

MODEL	TE8075	TE802	TE804	TE805	TE808	TE810	TE812
Suitable Excavator Weight (lbs)	1,760 – 4,410	4,410 – 8,820	8,820 – 15,430	15,430 – 24,250	24,250 – 39,680	41,880 – 57,320	68,180 – 121,250
Tool Diameter (in)	1.4"	1.8"	2.2"	2.7"	3.1"	3.5"	4.9"
Tool Length (in)	13.8"	16.7"	19.7"	22.0"	24.8"	28.7"	35.4"
Operating Pressure (psi)	1,300 – 2,100	1,450 – 2,200	1,450 – 2,200	1,600 – 2,200	1,600 – 2,200	1,600 – 2,200	1,600 – 2,400
Oil Flow (gpm)	11 – 16	13 – 18	16 – 22	18 – 26	21 – 29	24 – 32	37 – 50
Oil Flow (L/min)	42 – 61	49 – 68	61 – 83	68 – 98	80 – 110	110 – 121	140 – 189
Impact Rate (bpm)	700 – 1,200	600 – 1,100	500 – 900	400 – 800	400 – 750	400 – 700	300 – 500
Impact Energy (ft-lbs)	111 – 443	147 – 585	295 – 1,380	590 – 2,066	1,185 – 2,803	1,180 – 3,835	2,946 – 7,375
Impact Energy (joules)	150 – 600	200 – 1,200	400 – 1,600	800 – 2,800	1,200 – 3,800	1,600 – 5,200	4,000 – 10,000
Carrier Weight (lbs)	176	370	595	983	1,643	2,578	3,858
Carrier Weight (kg)	80	168	270	446	700	1,170	1,750
Hose Diameter (in)	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"

BUILT FOR A WIDE RANGE OF APPLICATIONS



Demolition



Construction



Utility Installation



Road Construction



Rock Excavation



Quarrying



Foundation Removal



Concrete Breaking



Asphalt Removal



Site Preparation



Trenching



Tunneling



Pipeline Work

** Due to ongoing development specifications may change at any time

BUILT TO BREAK. BUILT TO LAST.

POWERFUL HYDRAULIC HAMMERS FOR DEMOLITION, CONSTRUCTION AND UTILITY APPLICATIONS

TocDem Hydraulic Hammers deliver dependable performance across demolition, construction, utilities and excavation.

Built for demanding jobsites, they efficiently break concrete, rock and asphalt.

Available for excavators from 1,760 lbs to 121,250 lbs, from compact to heavy-duty equipment.

HEAVY-DUTY HEAD
BRACKET

PROTECTED
HYDRAULIC HOSES



REINFORCED
FRONT SECTION

HEAVY-DUTY
HOUSING

WORKING TOOL
RETAINER



Included as Standard



MOUNTING
BRACKET



HYDRAULIC HOSES & QUICK-
CONNECT COUPLERS



TWO CHISELS &
WORKING TOOLS

*** Due to ongoing development specifications may change at any time*

SCRAP SHEARS

POWERFUL STEEL CUTTING PERFORMANCE FOR DEMOLITION AND RECYCLING

TocDem TSH Series Scrap Shears are engineered to deliver powerful, precise cutting performance across demolition, scrap processing and metal recycling applications. Designed to efficiently cut structural steel, pipes, tanks, rebar and other ferrous materials, the TSH Series helps contractors improve productivity while maximizing material recovery.

Available for excavators from 26,460 lbs to 286,600 lbs, TocDem Scrap Shears provide dependable performance for contractors working in structural demolition, industrial dismantling and scrap metal processing.



HIGH CUTTING FORCE

Engineered to cut structural steel, pipe, tanks, rebar and heavy scrap with maximum cutting performance.



360° HYDRAULIC ROTATION

Continuous rotation allows precise positioning for cleaner cuts and improved efficiency.



DURABLE CONSTRUCTION

Built with heavy-duty materials and protected cylinders for long service life in demanding conditions.



3-YEAR WARRANTY

Every TocDem TSH Scrap Shear is backed by a 3-Year Warranty for added confidence.



BUILT FOR A WIDE RANGE OF APPLICATIONS



Structural Steel Demolition



Scrap Metal Processing



Industrial Dismantling



Steel Frame Demolition



Pipe Cutting



Tank Dismantling



Bridge Demolition



Recycling Operations




Rail and Heavy Steel Processing




Infrastructure Projects

INCLUDED AS STANDARD



CUSTOM HEAD
BRACKET /
HANGER



HYDRAULIC
HOSES



HYDRAULIC
COUPLINGS

Each head bracket is manufactured to match your excavator specifications at the time of ordering.

WHY CHOOSE TOCDEM?

- Heavy-duty construction for demanding demolition and recycling
- High cutting force for structural steel and scrap processing
- 360° hydraulic rotation for precise positioning
- Protected hydraulic cylinder design for added durability
- Interchangeable and reversible cutting blades
- Pressure Relief Valve (PRV) for hydraulic system protection
- Regenerative speed valve for faster operating cycles
- Backed by a 3-Year Warranty



WARRANTY

Every TocDem Hydraulic Selector Grab is backed by a 3-Year Warranty for your peace of mind.

SCRAP SHEAR SPECIFICATIONS

MODEL	TSH14	TSH20	TSH26	TSH36	TSH42	TSH56	TSH72	TSH82	TSH110	TSH130
Excavator Weight (lbs)	26,460 - 37,480 (12,000 - 17,000)	33,670 - 48,300 (15,000 - 21,000)	42,990 - 58,520 (19,500 - 27,000)	55,110 - 77,200 (25,000 - 35,000)	63,800 - 92,599 (29,000 - 42,000)	78,370 - 123,340 (36,000 - 56,000)	110,330 - 165,398 (50,000 - 75,000)	143,300 - 198,410 (65,000 - 90,000)	198,410 - 253,730 (90,000 - 116,000)	242,510 - 286,600 (110,000 - 130,000)
Weight (lbs)	1,610 (730)	2,090 (950)	2,830 (1,300)	3,430 (1,550)	4,610 (2,000)	6,380 (2,900)	9,480 (4,300)	11,900 (5,400)	15,650 (7,100)	20,720 (9,400)
Overall Length (in)	67.3 (1,716)	73.0 (1,855)	82.6 (2,095)	87.4 (2,220)	94.1 (2,395)	103.0 (2,615)	117.3 (2,975)	126.0 (3,175)	135.4 (3,440)	143.7 (3,650)
Overall Width (in)	27.2 (690)	29.9 (760)	33.1 (840)	35.6 (900)	37.6 (950)	42.1 (1,070)	49.3 (1,250)	53.5 (1,360)	58.7 (1,490)	61.8 (1,570)
Overall Height (in)	37.6 (950)	39.7 (1,000)	33.9 (860)	36.6 (930)	39.2 (990)	44.3 (1,120)	50.4 (1,280)	54.7 (1,390)	61.0 (1,550)	63.8 (1,620)
Max. Jaw Opening (in)	14.2 (360)	17.1 (435)	20.1 (510)	22.4 (570)	24.4 (620)	27.7 (700)	30.0 (760)	35.0 (890)	38.6 (980)	42.1 (1,070)
Blade Length (in)	7.1 (180)	8.3 (210)	9.4 (240)	10.6 (270)	11.8 (300)	13.0 (330)	15.0 (380)	16.5 (420)	18.1 (460)	19.7 (500)
Cutting Force Tip (tons)	90.7 (85)	112.4 (102)	134.3 (122)	168.7 (153)	191.8 (174)	230.9 (214)	280.8 (258)	340.2 (309)	404.7 (368)	448.7 (408)
Cutting Force Base (tons)	187.4 (170)	224.8 (204)	268.6 (244)	333.1 (302)	388.6 (348)	471.9 (428)	561.6 (518)	698.4 (640)	808.4 (735)	896.8 (816)
Operating Pressure (psi)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)	3,045 - 4,350 (210 - 300)
Oil Flow (gpm)	22 - 29 (85 - 110)	26 - 34 (100 - 130)	29 - 40 (110 - 150)	37 - 47 (140 - 180)	40 - 53 (150 - 200)	48 - 64 (180 - 240)	61 - 77 (230 - 330)	69 - 87 (260 - 330)	79 - 100 (300 - 380)	87 - 114 (330 - 430)
Rotation	360°	360°	360°	360°	360°	360°	360°	360°	360°	360°


** Due to ongoing development specifications may change at any time

SCRAP SHEARS

POWERFUL STEEL CUTTING PERFORMANCE FOR DEMOLITION AND RECYCLING

TocDem TSH Series Scrap Shears are built for demanding demolition and scrap processing.

Continuous 360° rotation, protected hydraulic components and replaceable cutting blades deliver the control, reliability and productivity contractors need on every job.

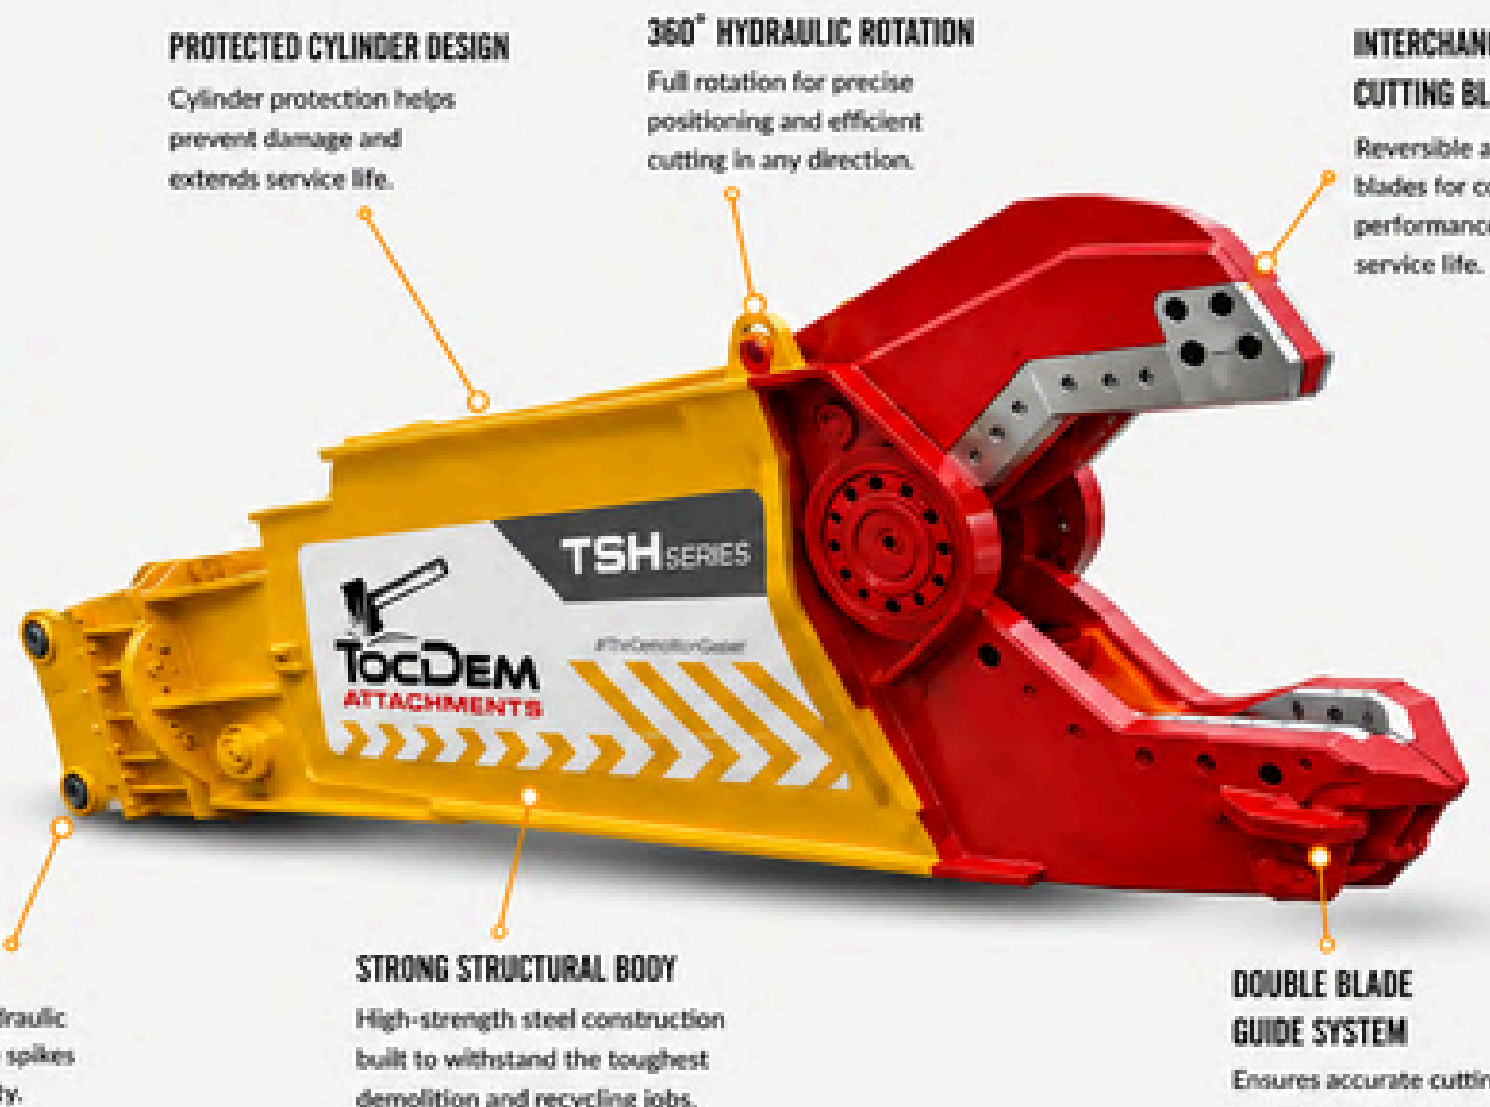

PROTECTED CYLINDER DESIGN

Cylinder protection helps prevent damage and extends service life.

360° HYDRAULIC ROTATION

Full rotation for precise positioning and efficient cutting in any direction.

INTERCHANGEABLE CUTTING BLADES

Reversible and replaceable blades for consistent cutting performance and longer service life.

PRESSURE RELIEF VALVE (PRV)

Helps protect the hydraulic system from pressure spikes for increased reliability.


STRONG STRUCTURAL BODY

High-strength steel construction built to withstand the toughest demolition and recycling jobs.

DOUBLE BLADE GUIDE SYSTEM


Ensures accurate cutting alignment and reduces blade wear.

INCLUDED AS STANDARD



CUSTOM MOUNTING BRACKET

Each mounting bracket is manufactured to match your excavator specifications at the time of ordering.



HYDRAULIC HOSES

High-quality hoses for reliable hydraulic performance.



QUICK-CONNECT COUPLERS

Makes connecting and disconnecting fast, safe and easy.



MOUNTING PINS

Precision-engineered pins for secure and durable attachment.



WARRANTY

Every TocDem Scrap Shear is backed by a 3-Year Warranty for your peace of mind.

BUILT FOR A WIDE RANGE OF APPLICATIONS

- Structural Steel Demolition
- Scrap Metal Processing
- Industrial Dismantling
- Steel Frame Demolition
- Pipe Cutting
- Tank Dismantling
- Bridge Demolition
- Recycling Operations
- Rail and Heavy Steel Processing
- Infrastructure Projects

WHY CHOOSE TOCDem?

- Heavy-duty construction for demanding demolition and recycling
- High cutting force for structural steel and scrap processing
- 360° hydraulic rotation for precise positioning
- Protected hydraulic cylinder design for added durability
- Interchangeable and reversible cutting blades
- Pressure Relief Valve (PRV) for hydraulic system protection
- Regenerative speed valve for faster operating cycles
- Backed by a 3-Year Warranty

**** Due to ongoing development specifications may change at any time**

HYDRAULIC SELECTOR GRABS

PRECISION MATERIAL HANDLING FOR DEMOLITION, RECYCLING AND CONSTRUCTION

TocDem TGR Series Hydraulic Selector Grabs provide powerful, controlled material handling for demolition, recycling, construction, forestry and waste handling applications.

Continuous 360° hydraulic rotation gives operators precise positioning for sorting, loading and handling bulky or irregular materials.

Available for a wide range of excavators, the TGR Series combines strong gripping performance with excellent operator control for demanding jobsites.



WHY USE TOCDEM SELECTOR GRABS?

- Continuous 360° hydraulic rotation
- Synchronized hydraulic cylinders for smooth operation
- Interchangeable cutting blades
- Configurable jaws for multiple applications
- Suitable for demolition, recycling, construction, forestry and waste handling
- Technical support and replacement parts available
- Backed by a 3-Year Warranty

TGR Model	U.M.	TGR1-S	TGR2	TGR4	TGR5	TGR6	TGR12	TGR16	TGR22	TGR26	TGR32	TGR42
OPENING (A)	in	31"	31"	32"	52"	60"	68"	76"	90"	96"	98"	118"
	mm	770	770	800	1,300	1,500	1,700	1,900	2,280	2,450	2,500	3,000
EXCAVATOR WEIGHT	lbs	1,760 - 4,180	1,760 - 4,180	4,400 - 8,800	8,800 - 15,400	17,600 - 22,000	24,200 - 39,600	39,600 - 55,400	48,400 - 66,000	66,000 - 110,000	77,000 - 132,000	110,000 - 143,000
	metric tonnes	0.8 - 1.9	0.8 - 1.9	2.0 - 4.0	4.0 - 7.0	8.0 - 10.0	11.0 - 18.0	18.0 - 25.0	22.0 - 30.0	30.0 - 50.0	35.0 - 60.0	50.0 - 65.0
ATTACHMENT WEIGHT	lbs	220	308	374	950	1,361	2,293	2,640	3,924	5,401	6,173	7,716
	kg	100	140	170	432	619	1,040	1,200	1,780	2,450	2,800	3,500
MAX OIL PRESSURE	psi	3,626	3,626	3,626	3,626	3,626	3,626	4,351	4,351	4,351	4,351	4,786
	bar	250	250	250	250	250	250	300	300	300	300	330


**** Due to ongoing development specifications may change at any time**

PRECISION GRIP. MAXIMUM CONTROL.

POWERFUL, CONTROLLED MATERIAL HANDLING

TocDem Hydraulic Selector Grabs provide the gripping force and control required to securely handle, sort and position a wide range of materials.

Continuous 360° rotation helps operators work accurately across demolition, recycling, construction and material handling applications.

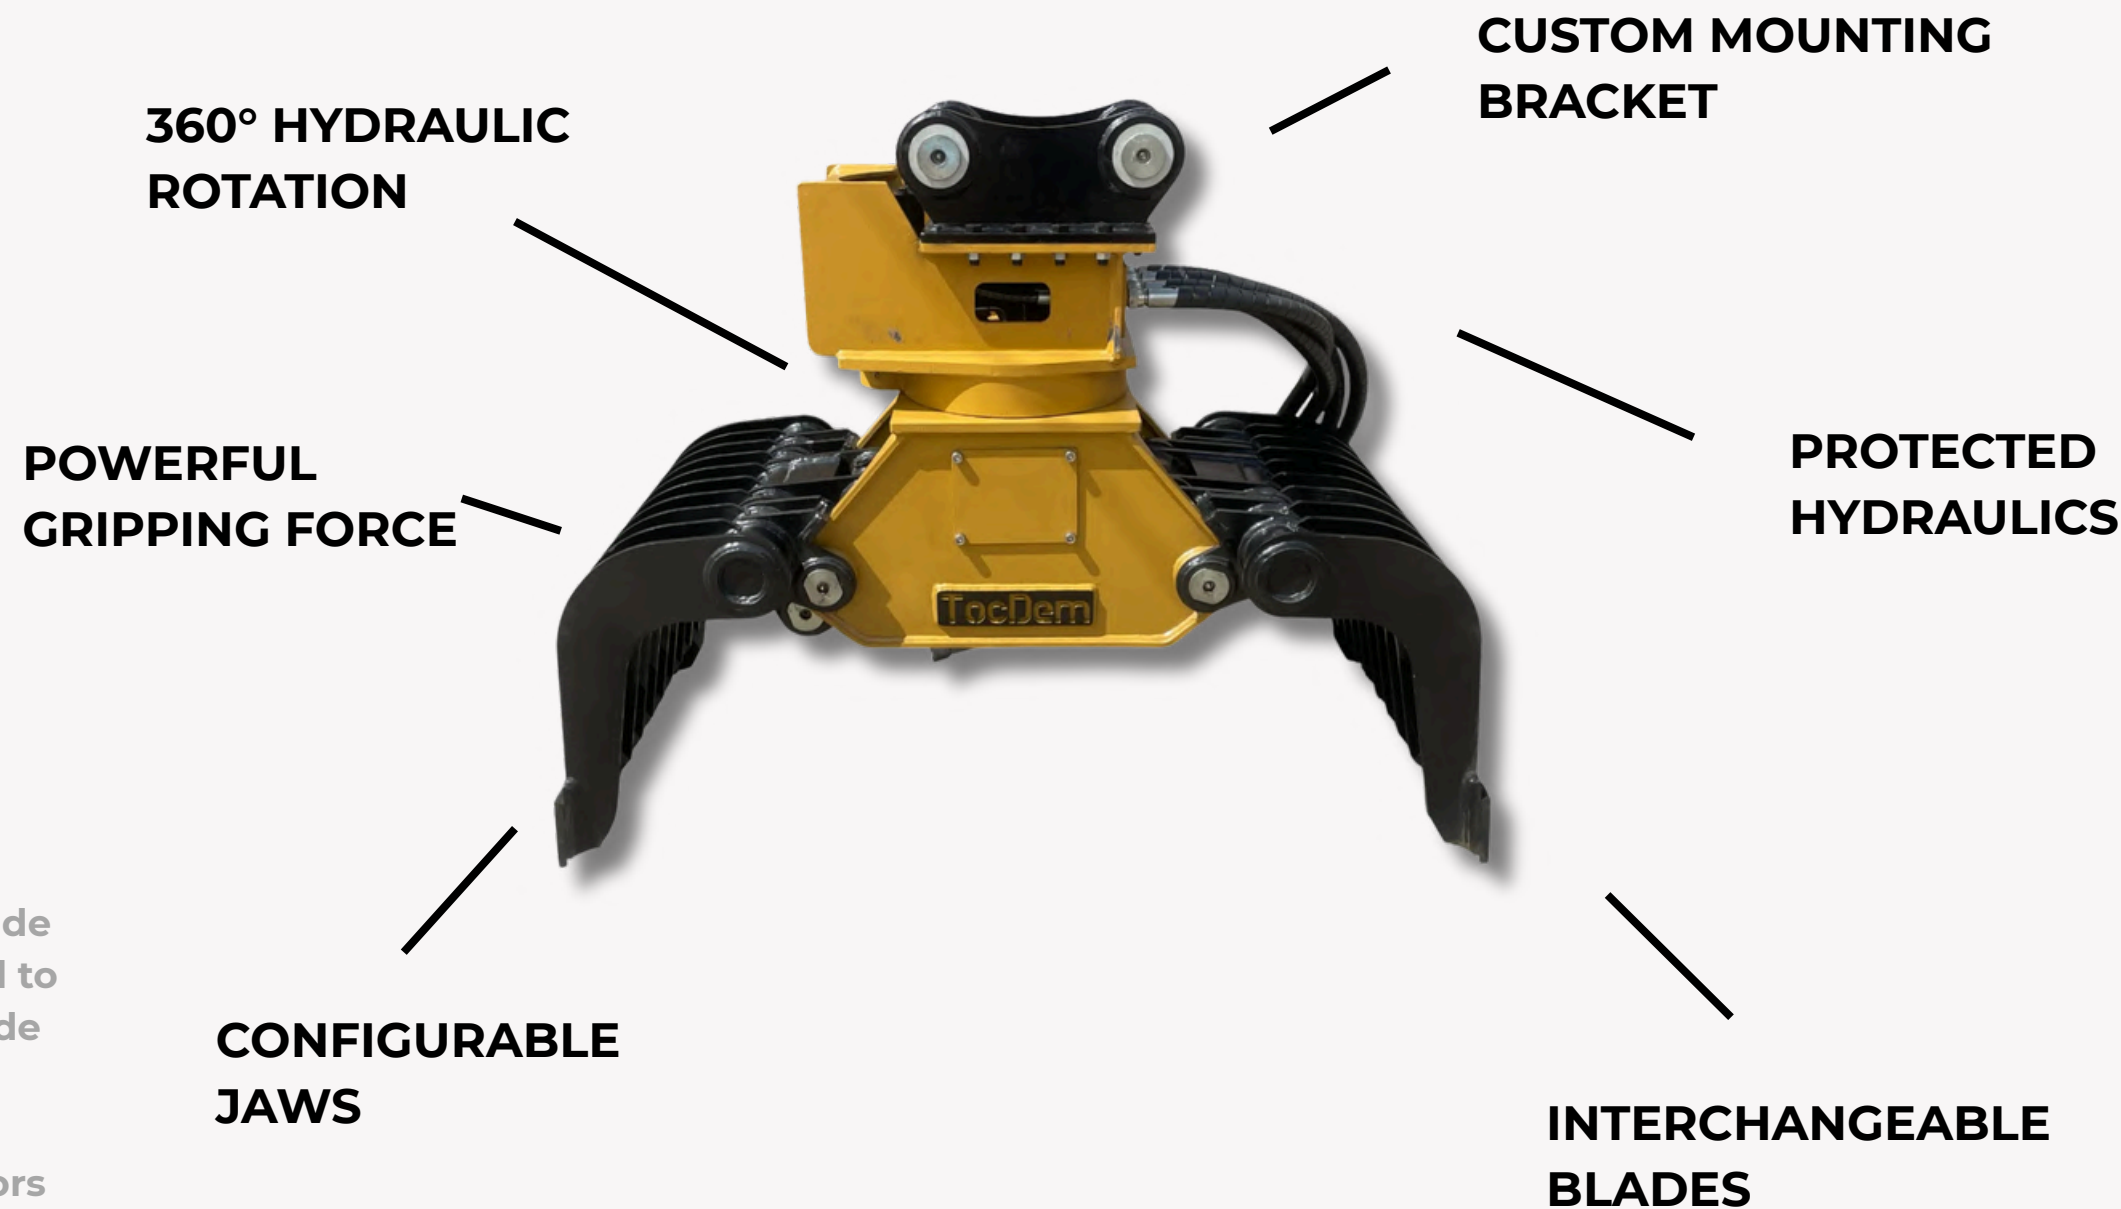

Included as Standard



CUSTOM MOUNTING
BRACKET



HYDRAULIC HOSES



QUICK-CONNECT
COUPLERS

*** Due to ongoing development specifications may change at any time*

HYDRAULIC THUMB

ENGINEERED FOR SUPERIOR GRIPPING POWER, DURABILITY AND CONTROL

TocDem Hydraulic Thumbs help excavators handle concrete, rock, timber, pipes, scrap metal and demolition debris with confidence. Built for demanding jobsites and backed by a 3-year warranty.

Designed to work alongside your excavator bucket, TocDem Hydraulic Thumbs provide excellent control when handling awkward, bulky or irregular materials across a wide range of applications.



STRONGER GRIP

Powerful hydraulic performance for secure handling of tough materials.



BUILT TO LAST

Heavy-duty steel construction for maximum durability and long service life.



SMOOTH CONTROL

Precision-engineered design for excellent movement and positioning.



WIDE MACHINE COMPATIBILITY

Suitable for excavators from 2,200 lbs to 77,200 lbs.



3-YEAR WARRANTY

Every TocDem Hydraulic Thumb is backed by a 3-Year Warranty.

WHY CHOOSE TOCDEM?

- Heavy-duty construction for demanding applications
- Reinforced wear areas for longer service life
- Excellent digging performance and material retention
- Multiple widths and excavator size ranges
- Precision manufactured for consistent fit and performance
- Compatible with a wide range of excavators
- Built for construction, demolition, utilities, recycling and groundworks
- Backed by TocDem's 3-Year Warranty

IDEAL FOR A WIDE RANGE OF APPLICATIONS

- | | |
|--------------|----------------------|
| Construction | Recycling |
| Demolition | Material Handling |
| Utilities | Waste Management |
| Forestry | Pipe Handling |
| Landscaping | Scrap Metal Handling |
| | Timber Handling |
| | Rock Handling |



WARRANTY

Every TocDem Hydraulic Thumb is backed by a 3-Year Warranty for your peace of mind.

**** Due to ongoing development specifications may change at any time**

HYDRAULIC THUMB SPECIFICATIONS

MODEL	TD71	TD75	TD78	TD714	TD722	TD735
Excavator Weight (lbs)	2,200 - 4,400 (1,000 - 2,000 kg)	6,600 - 11,000 (3,000 - 5,000 kg)	13,200 - 17,600 (6,000 - 8,000 kg)	19,800 - 30,900 (9,000 - 14,000 kg)	33,100 - 48,500 (15,000 - 22,000 kg)	50,700 - 77,200 (23,000 - 35,000 kg)
Thumb Height (in)	31.1" (790 mm)	36.4" (930 mm)	44.1" (1,120 mm)	53.3" (1,355 mm)	61.2" (1,555 mm)	68.3" (1,735 mm)
Thumb Width (in)	10.6" (270 mm)	12.6" (320 mm)	14.6" (370 mm)	16.5" (420 mm)	18.5" (470 mm)	20.5" (520 mm)
Thumb Depth (in)	11.6" (295 mm)	13.6" (345 mm)	16.1" (410 mm)	18.5" (470 mm)	20.9" (530 mm)	23.2" (590 mm)
Max Opening (in)	32.7" (830 mm)	40.2" (1,020 mm)	48.0" (1,220 mm)	56.7" (1,440 mm)	64.2" (1,630 mm)	71.3" (1,810 mm)
Cylinder Stroke (in)	12.6" (320 mm)	14.6" (370 mm)	17.7" (450 mm)	19.7" (500 mm)	22.4" (570 mm)	24.8" (630 mm)
Cylinder Force (lbs)	7,640	11,240	13,600	18,430	20,220	22,590
Pin Diameter (in)	1.18" (30 mm)	1.57" (40 mm)	1.97" (45 mm)	1.97" (50 mm)	2.36" (60 mm)	2.76" (70 mm)
Pin Centers (in)	9.1" (230 mm)	11.8" (300 mm)	13.8" (350 mm)	15.7" (400 mm)	17.7" (450 mm)	19.7" (500 mm)
Weight (lbs)	176 (80 kg)	286 (130 kg)	407 (185 kg)	616 (280 kg)	880 (400 kg)	1,268 (575 kg)

IDEAL FOR A WIDE RANGE OF APPLICATIONS

- | | | | | | | | | | | |
|--------------|------------|-----------|----------|-------------|-----------|-------------------|---------------|----------------------|-----------------|---------------|
| Construction | Demolition | Utilities | Forestry | Landscaping | Recycling | Material Handling | Pipe Handling | Scrap Metal Handling | Timber Handling | Rock Handling |
|--------------|------------|-----------|----------|-------------|-----------|-------------------|---------------|----------------------|-----------------|---------------|

MAXIMUM GRIP. MAXIMUM CONTROL.

TocDem Hydraulic Thumbs are engineered to add powerful gripping capability to your excavator, helping you handle a wide range of materials with greater control, speed and confidence.

Built for demolition, construction, utilities, forestry, recycling and material handling applications, our hydraulic thumbs improve productivity while reducing the need for manual handling.

Suitable for excavators from 2,200 lbs to 77,200 lbs, every TocDem Hydraulic Thumb is built for strength, durability and long-term performance on demanding jobsites.

**HEAVY-DUTY
CONSTRUCTION**



**HEAVY-DUTY
MOUNTING BRACKETS**

POWERFUL HYDRAULICS

STRONG, SECURE GRIP

VERSATILE PERFORMANCE

*** Due to ongoing development specifications may change at any time*

SECONDARY CONCRETE PULVERIZERS

POWERFUL ATTACHMENTS FOR CONCRETE PROCESSING AND DEMOLITION RECYCLING

TocDem TRV Series Secondary Concrete Pulverizers are engineered to efficiently process reinforced concrete following primary demolition. Designed for crushing concrete, separating reinforcing steel and preparing material for recycling, the TRV Series delivers the power, precision and durability contractors need on demanding demolition projects.

Available in multiple models, TocDem TRV Secondary Concrete Pulverizers are suitable for excavators ranging from 15,430 lbs to 264,550 lbs, providing dependable performance across commercial demolition, industrial demanding and infrastructure projects.



POWERFUL CRUSHING PERFORMANCE

Engineered to crush reinforced concrete and separate rebar with maximum efficiency.



360° HYDRAULIC ROTATION

Continuous rotation allows precise positioning for improved productivity and control.



BUILT TO WITHSTAND

Heavy-duty construction and protected cylinder design for long service life in demanding conditions.



3-YEAR WARRANTY


Every TocDem TRV Pulverizer is backed by a 3-Year Warranty for added confidence.



BUILT FOR A WIDE RANGE OF APPLICATIONS

- Secondary Concrete Demolition
- Concrete Recycling
- Reinforced Concrete Processing
- Rebar Separation
- Material Reduction
- Site Clearance
- Commercial Demolition
- Industrial Demolition
- Infrastructure Projects
- Material Preparation for Recycling

INCLUDED AS STANDARD



MOUNTING BRACKET HYDRAULIC HOSES QUICK-CONNECT COUPLERS MOUNTING PINS

WHY CHOOSE TOCDEM?

- 360° hydraulic rotation for precise positioning
- Regenerative hydraulic circuit for responsive jaw operation
- Pressure Relief Valve (PRV) for hydraulic system protection
- Reversed cylinder design for added rod protection
- Interchangeable blades and teeth for easier maintenance
- Built for demanding primary and secondary demolition
- Backed by a 3-Year Warranty



WARRANTY

Every TocDem TRV Pulverizer is backed by a 3-Year Warranty for your peace of mind.

SECONDARY CONCRETE PULVERIZER SPECIFICATIONS

MODEL	TRV8	TRV12	TRV18	TRV22	TRV35	TRV45	TRV65	TRV85	TRV115
Excavator Weight (lbs)	15,430 - 22,050	22,050 - 30,860	30,860 - 44,100	44,100 - 55,120	55,120 - 66,200	66,200 - 110,200	110,200 - 154,300	154,300 - 198,400	198,400 - 264,550
Overall Length (in)	56.3	62.6	70.9	76.4	80.3	88.6	97.7	110.6	137.8
Overall Width (in)	27.6	31.5	35.4	39.8	43.3	47.2	55.1	59.1	63.0
Overall Height (in)	31.5	35.8	40.2	44.1	47.3	53.9	59.8	63.8	67.7
Max. Jaw Opening (in)	27.6	31.5	35.4	39.4	43.2	51.2	55.1	59.1	63.0
Crushing Force (tons)	66.1	88.2	121.3	143.3	186.4	198.4	231.5	253.8	485.0
Rotational Flow (gpm)	16 - 26	20 - 30	26 - 37	30 - 40	34 - 65	50 - 65	60 - 75	70 - 85	80 - 95
Operating Pressure (psi)	3,045 - 4,350	3,045 - 4,350	3,045 - 4,350	3,045 - 4,350	3,045 - 4,350	3,045 - 4,350	3,045 - 4,350	3,045 - 4,350	3,045 - 4,350
Weight	2,425	3,307	4,741	5,822	6,614	8,377	10,141	17,196	22,046

**** Due to ongoing development specifications may change at any time**

POWERFUL CRUSHING. MAXIMUM PRODUCTIVITY.

BUILT FOR DEMOLITION. ENGINEERED FOR PERFORMANCE.

TocDem TRV Series Secondary Concrete Pulverizers are built to handle demanding secondary demolition and concrete processing applications with ease.

Reinforced jaws and a robust structure deliver the power, precision and durability contractors rely on to get the job done safely and efficiently.

Designed for crushing concrete, separating rebar and preparing material for recycling, TRV Series pulverizers provide consistent performance in the toughest jobsite conditions.

Available in multiple models for excavators from **15,430 lbs** to **264,550 lbs**.

REGENERATIVE HYDRAULIC CIRCUIT


Provides faster jaw opening and closing for improved cycle times and productivity.

360° HYDRAULIC ROTATION

Continuous rotation for precise positioning and efficient crushing from any direction.

POWERFUL JAW SYSTEM

High crushing force for efficient concrete reduction and rebar separation.

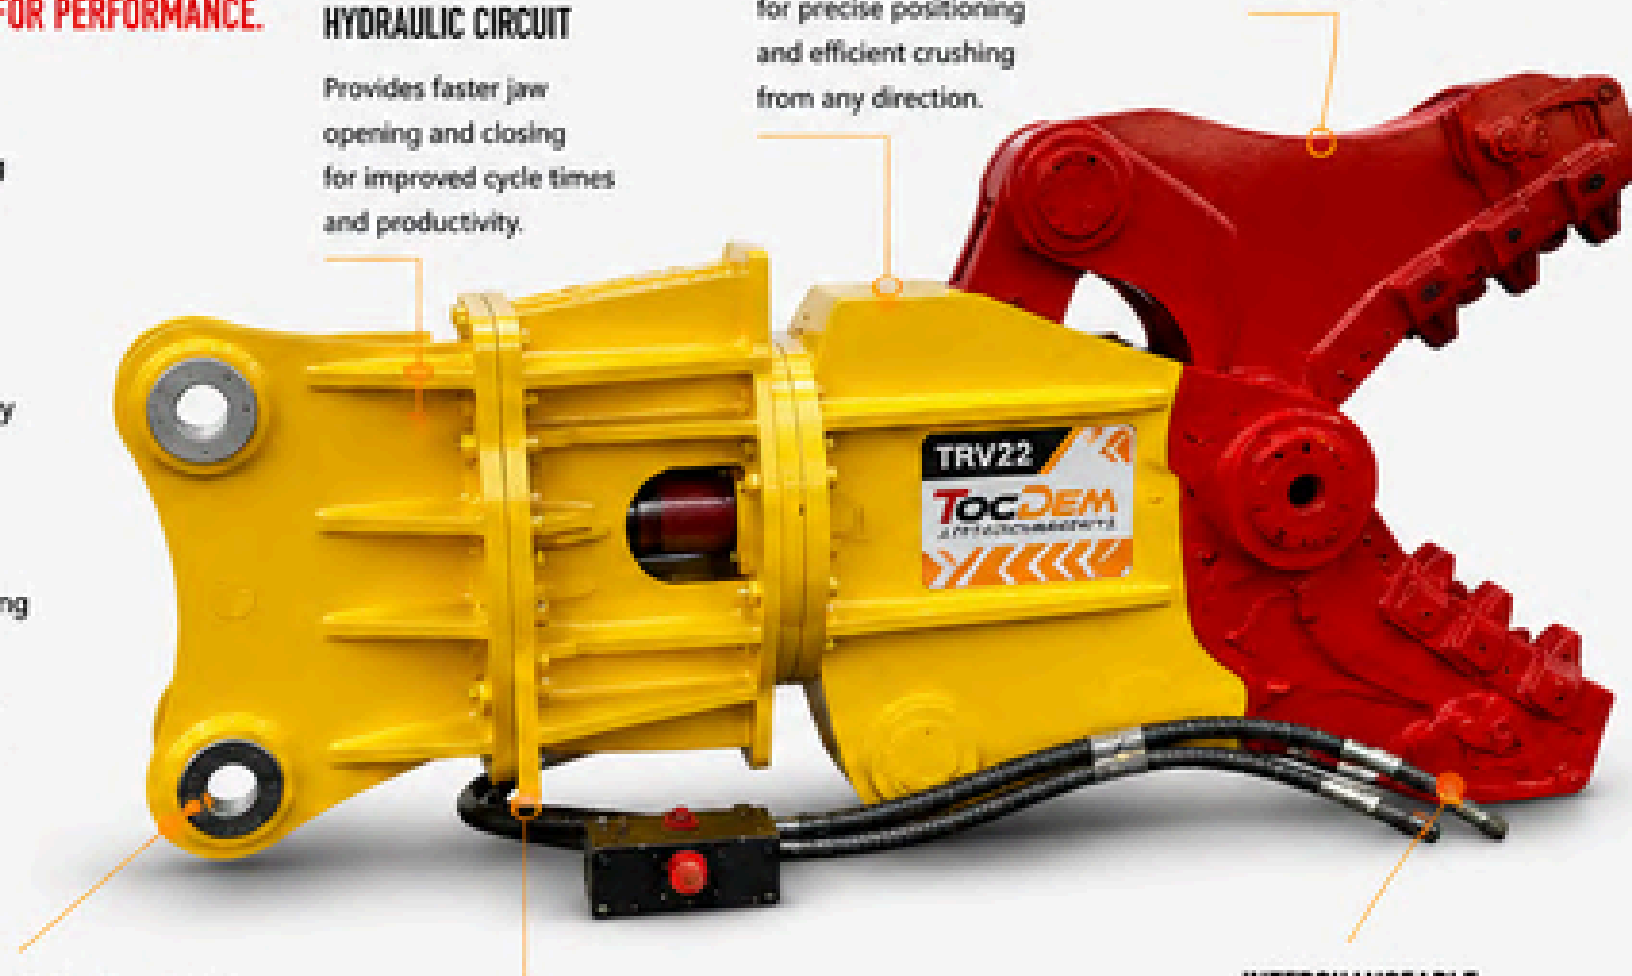

PRESSURE RELIEF VALVE (PRV)

Helps protect the hydraulic system from pressure spikes and increases reliability.

PROTECTED HYDRAULIC CYLINDERS

Cylinder protection helps prevent damage and extends service life in demanding environments.

INTERCHANGEABLE BLADES & TEETH

Replaceable wear parts extend service life and reduce maintenance time and cost.

BUILT FOR A WIDE RANGE OF APPLICATIONS

-  Secondary Concrete Demolition
-  Concrete Recycling
-  Reinforced Concrete Processing
-  Rebar Separation
-  Material Reduction
-  Site Clearance
-  Commercial Demolition
-  Industrial Demolition
-  Infrastructure Projects
-  Material Preparation for Recycling

**** Due to ongoing development specifications may change at any time**

PUSH PRO PIPE PUSHERS

SAFER PE PIPE INSTALLATION FOR UTILITY CONTRACTORS

TocDem Push Pro Pipe Pushers help contractors safely grip, align and install PE pipe directly from the excavator.

Built for demanding utility applications, the Push Pro range improves installation accuracy, reduces manual handling and helps increase jobsite productivity.

Available for excavators up to 88,000 lbs (40,000 kg), with models for gas, water, electrical and telecommunications infrastructure projects.



WHY USE TOCDEM PUSH PRO?

- Reduced manual pipe handling
- Improved operator control
- Accurate pipe positioning
- Custom excavator fitment
- Wide range of pipe capacities
- Models for excavators up to 88,000 lbs (40,000 kg)
- Technical support and replacement parts available
- Backed by a 3-Year Warranty

TocDem Model	Push Pro 8"	Push Pro 12"	Push Pro 16"	Push Pro 22"	Push Pro 26"	Push Pro 36"
Model Number	PP180-USA	PP250-USA	PP400-USA	PP500-USA	PP630-USA	PP900-USA
Price (USD)	\$10,500	\$14,500	\$25,000	\$33,500	\$40,000	\$50,000
Suitable	1,760 -	6,600 - 17,600	11,000 -	17,600 -	30,800 -	48,400 -
Minimum Pipe	3" (63 mm)	3" (63 mm)	8" (180 mm)	12" (250 mm)	14" (355 mm)	20" (500 mm)
Maximum Pipe	8" (180 mm)	12" (250 mm)	16" (400 mm)	20" (500 mm)	26" (630 mm)	36" (900 mm)
Attachment	86 lbs (39 kg)	220 lbs (100	770 lbs (350	1,100 lbs	1,650 lbs	1,980 lbs
Average Pushing	39.4 ft/min	39.4 ft/min (12	39.4 ft/min	39.4 ft/min	39.4 ft/min	39.4 ft/min
Length	10" (250 mm)	16" (400 mm)	20" (500 mm)	24" (600 mm)	28" (700 mm)	32" (800 mm)
Width	14" (350 mm)	19" (475 mm)	28" (700 mm)	40" (1,000	60" (1,500	68" (1,700
Height	20" (500 mm)	26" (650 mm)	32" (800 mm)	36" (900 mm)	40" (1,000	48" (1,200

**** Due to ongoing development specifications may change at any time**

PUSH WITH CONTROL. BUILT FOR PRECISION.

SAFER, MORE CONTROLLED PE PIPE INSTALLATION


TocDem Push Pro Pipe Pushers simplify PE pipe installation by allowing operators to grip, align and install pipe directly from the excavator. This reduces manual handling while improving control, installation accuracy and jobsite productivity.

Built for demanding utility applications, the Push Pro range supports gas, water, electrical and telecommunications projects across North America.

CUSTOM MOUNTING
BRACKET

360°
ROTATION

PIPE GRIP /
CLAMPING AREA

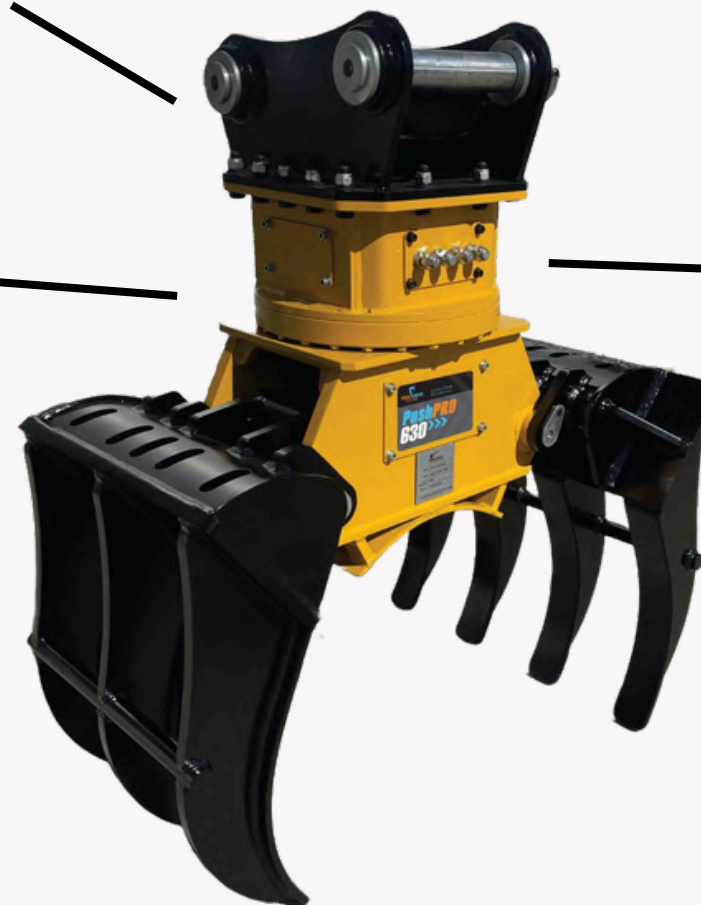

HYDRAULIC
CONNECTIONS

HEAVY-DUTY
CLAW JAWS



Included as Standard



CUSTOM MOUNTING
BRACKET



HYDRAULIC HOSES



QUICK-CONNECT
COUPLERS

*** Due to ongoing development specifications may change at any time*

HEAVY DUTY EXCAVATOR BUCKETS

BUILT FOR TOUGH DIGGING APPLICATIONS

TocDem Heavy Duty Excavator Buckets are engineered for strength, durability and consistent performance across construction, demolition, utilities, recycling and groundworks. Built to withstand daily use in demanding conditions, these buckets are designed to deliver dependable performance and reduce downtime on site.

Designed to fit a wide range of excavator sizes, each bucket provides excellent penetration, efficient material retention and long service life.



HEAVY DUTY CONSTRUCTION

Built with high-strength steel and reinforced wear areas for demanding applications.



EXCELLENT PERFORMANCE

Designed for superior penetration, efficient digging and material retention.



WIDE COMPATIBILITY

Available in multiple widths and excavator size ranges to suit many makes and models.



3-YEAR WARRANTY

Every TocDem bucket is backed by a 3-Year Warranty for confidence.

**** Due to ongoing development specifications may change at any time**



BUILT FOR A WIDE RANGE OF APPLICATIONS



General Excavation



Site Preparation



Construction



Utility Installation



Groundworks



Demolition



Landscaping



Recycling



Civil Engineering



Agriculture




Quarry Work




Material Handling

INCLUDED AS STANDARD



CUSTOM MOUNTING BRACKET / HANGER
(where specified)



MOUNTING PINS

Each head bracket is manufactured to match your excavator specifications at the time of ordering.

WHY CHOOSE TOCDEM?

- Heavy-duty construction for demanding jobsite conditions
- Reinforced wear areas for extended service life
- Excellent penetration for efficient digging
- Multiple bucket widths and excavator size options
- Precision manufactured for consistent fit and performance
- Built for construction, demolition, utilities and groundworks
- Backed by a 3-Year Warranty



WARRANTY

Every TocDem Heavy Duty Excavator Bucket is backed by a 3-Year Warranty for your peace of mind.

HEAVY DUTY EXCAVATOR BUCKET SPECIFICATIONS

MODEL NUMBER	EXCAVATOR SIZE (lb)	PIN DIAMETER (mm)	PIN DIAMETER (in)	BUCKET SIZE (in)	WEIGHT EACH (kg)	WEIGHT EACH (lb)	NO. OF TEETH
TB45-12	17,600	45	1.77	12	180	397	4
TB45-18	17,600	45	1.77	18	220	485	4
TB45-24	17,600	45	1.77	24	260	573	4
TB45-36	17,600	45	1.77	36	310	683	5
TB45-48	17,600	45	1.77	48	360	794	7
TB65-24	30,900	65	2.56	24	520	1,146	3
TB65-30	30,900	65	2.56	30	580	1,279	4
TB65-36	30,900	65	2.56	36	630	1,389	4
TB65-42	30,900	65	2.56	42	700	1,543	5
TB65-48	30,900	65	2.56	48	760	1,676	6
TB80-24	48,500	80	3.15	24	780	1,720	4
TB80-30	48,500	80	3.15	30	845	1,863	4
TB80-36	48,500	80	3.15	36	910	2,006	4
TB80-42	48,500	80	3.15	42	1,020	2,249	4
TB80-48	48,500	80	3.15	48	1,130	2,491	5
TB80-54	48,500	80	3.15	54	1,240	2,734	5
TB80-60	48,500	80	3.15	60	1,380	3,042	6
TB100-30	77,200	100	3.94	30	1,280	2,822	5
TB100-36	77,200	100	3.94	36	1,380	3,042	5
TB100-42	77,200	100	3.94	42	1,490	3,285	5
TB100-48	77,200	100	3.94	48	1,620	3,571	6
TB100-60	77,200	100	3.94	60	1,880	4,145	7
TB100-72	77,200	100	3.94	72	2,200	4,850	7

BUILT FOR TOUGH DIGGING APPLICATIONS.

TocDem Heavy Duty Excavator Buckets are engineered for strength, durability and consistent performance across construction, demolition, utilities, recycling and groundworks.

Designed to fit a wide range of excavator sizes, these buckets are built to handle demanding conditions and deliver dependable results every time.



TOCD^{EM}

ATTACHMENTS & UTILITIES

— GET **IN TOUCH** —



sales@tocdemusa.com

— USA & CANADA LOCATIONS —

